




YONGLITAI AXLE

Transport your load safely
efficiently and sustainably

PRODUCT CATALOG

Agricultural Axle

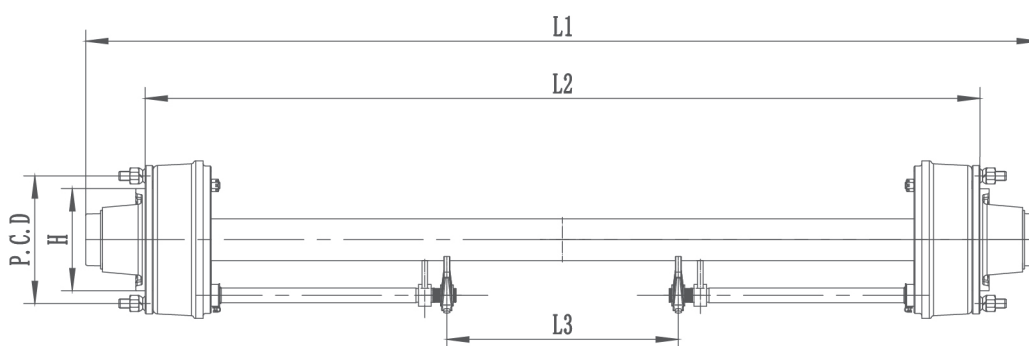

Technical parameter

Item	Max.capacity	"S" cam brake series x width	Track L2	Distance of slack adjuster (I3)	Axle beam	Axle beam		Total length L1	Recommended wheel fixing	Weight	Bearings installation
						Stud	P.C.D.				
LTD09M17	9t	300×90mm	1930mm	1450mm	□90mm	8×M20×1.5 ISO	275mm	2182mm	6.5"-16" 19.5"×6.75"	≈173kg	外32212 内32215
LTD09N17	9t	300×90mm	2000mm	200mm	□80mm	8×M20×1.5 ISO	275mm	2252mm	6.5"-16" 19.5"×6.75"	≈173kg	外32212 内32215
LTD09M17T1	9t	300×135mm	2000mm	200mm	□90mm	8×M20×1.5 ISO	275mm	2252mm	6.5"-16" 17"×6.75"	/	外32212 内32215
LTD09N17T1	9t	300×60mm	2000mm	200mm	□80mm	8×M18×1.5 ISO	275mm	2252mm	6.5"-16"	/	外32211 内32214

- Note:**
1. Track length is optional.
 2. ABS and automatic slack adjuster are optional.
 3. Rights of changing product design and specification are reserved.

The Customized Solution Provider for Running Gear Systems

YONGLITAI AXLE CO.,LTD.

- 🏠 Add.1: F1, F2, No.1, Zone E, Yonglitai Industrial Park,
Sanshui, Foshan, Guangdong, China
Add.2: Mohe Community, Economic Development Zone,
Gucheng, Xiangyang, Hubei, China
- ☎ Tel: +86-757-88311381(Oversea)
+86-757-88311360(Foshan)
+86-0710-7402969(Hubei)
- ☎ Fax: +86-757-88311322
- ✉ E-mail: sales@lctmc.com
- 🌐 Website: www.lctmc.com